



Update Xtion Pro v5.3.25 to v5.3.26 SOP

1. Download and install required program files from Asus using the direct link provided
([Global-http://dlcdnet.asus.com/pub/ASUS/MM/Xtion_Pro/V1164_1202.zip](http://dlcdnet.asus.com/pub/ASUS/MM/Xtion_Pro/V1164_1202.zip)
or alternative link:
http://pd.geovision.tw/support/XtionProUpdate/V1164_1202.zip) 623MB).
After download and extraction of the zip file are completed, use ISO extractor such as winrar to extract the setup program file or burn the ISO image onto a CD/DVD media to install the program files. When installation is completed, this will allow the PC to detect the Xtion Pro camera properly.
2. Download firmware and NiDeviceInfo tools via the links below.
http://pd.geovision.tw/support/XtionProUpdate/FW5.3.26_for_RD1.081.zip
<http://pd.geovision.tw/support/XtionProUpdate/NiDeviceInfo.zip>
When download is completed, extract both zip files to an alternative location on the system. (e.g: C:\)
3. Connect the Xtion Pro camera onto the PC via USB port (one at a time) Launch firmware_upgrade_tool.exe under extracted folder in FW5.3.26 for RD1.08\FWUpgrade.
4. The follow window will open to perform the upgrade, click on Next to proceed.
5. When the upgrade is completed, the following window will show up with the showing upgrade has been successful. Click on Finish to close the window.

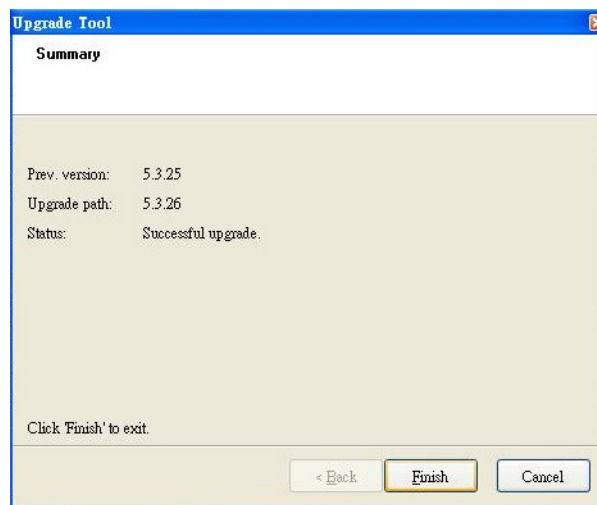

- To verify the firmware version installed again on the camera, open a command prompt and then run the NiDeviceInfo.exe under Extract NiDeviceInfo folder depending where NiDeviceInfo.zip download earlier was extracted.
- NiDeviceInfo.exe is able to display the current firmware information of the Xtion pro camera connected.

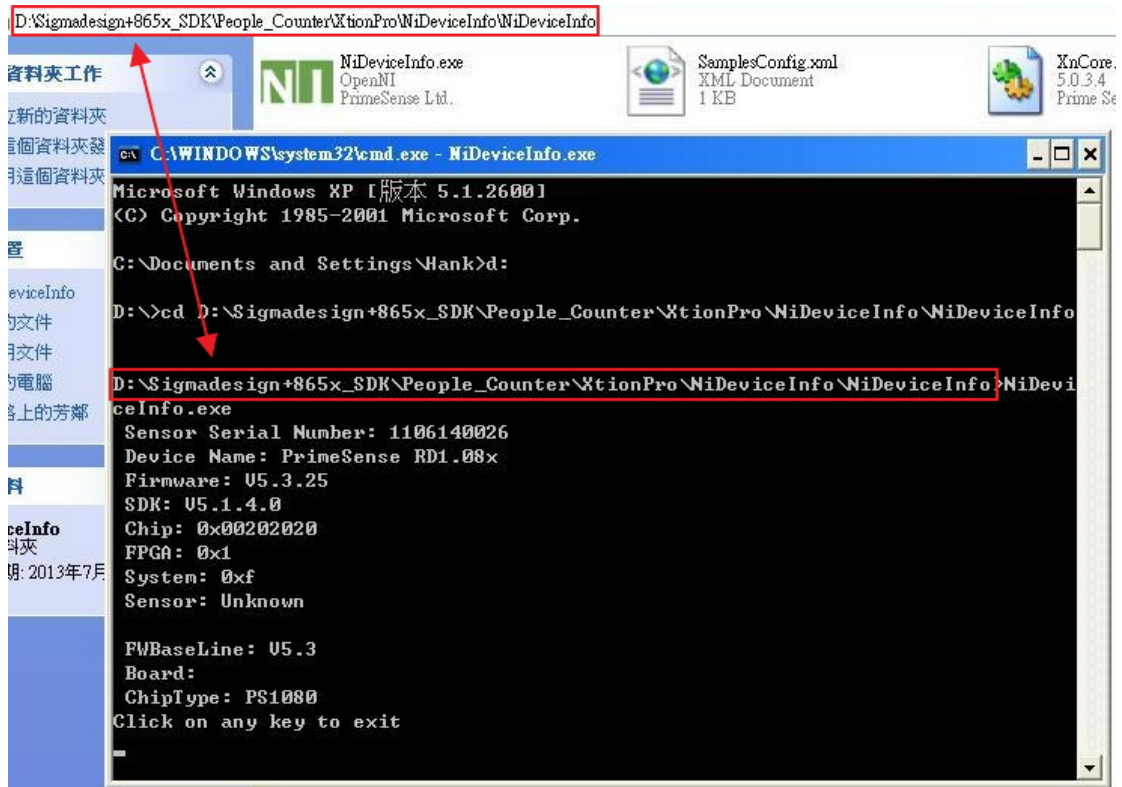

If there is more devices to update, please disconnect the upgraded camera and connect the next Xtion Pro camera and follow Steps 3 to 7 again.

For any question or assistance, you may contact GeoVision Support at support@geovision.com.tw